

# Cables

for robotic technology



[www.sab-cable.com](http://www.sab-cable.com)



## Family business in the third generation

**75** years of experience in cable and wire manufacturing as well as in temperature measurement technology turned a one-man business into a company with more than 550 employees. We prove our strength every year with more than 1500 special products according to customers' requirements. Each product is a new challenge for our creative technical team. We at **SAB** see ourselves as a manufacturer and a service provider – in the sense of true partnership and the greatest possible customer orientation.

Today, the quality of our products is known and appreciated in more than 100 countries around the world. In all product ranges, we are certified according to DIN EN ISO 9001. Furthermore, we have implemented an environmental management system for our company according to DIN EN ISO 14001, an occupational health and safety management system according to NLF/ILO-OSH and DIN ISO 45001, and an energy management system according to DIN EN ISO 50001.


And also for the future, our slogan is: **"WE GO FORWARD!"**

FOUNDED:	1947 by Peter Bröckskes sen. an independent, medium-sized company.
CEO:	Peter Bröckskes and Sabine Bröckskes-Wetten
PLANT/LOCATION:	In Viersen (Lower Rhine) 110.000 m <sup>2</sup> company site.  Own manufacturing from copper conductor to outer sheath.  VDE approved burnchamber and laboratory within the company.
EMPLOYEES/WORKERS:	approx. 430 at the plant in Viersen, 550 worldwide
YEARLY SALES:	over 134 Mio. € worldwide
PRODUCTS:	Special Cables  Measurement Technology  Cable Harnessing
CERTIFICATES AND APPROVALS:	<p>Quality management system acc. to DIN EN ISO 9001 for every manufacturing field</p> <p>Environmental management system acc. to DIN EN ISO 14001</p> <p>Occupational health and safety management acc. to NLF/ILO-OSH and DIN ISO 45001</p> <p>Energy management system acc. to DIN EN ISO 50001</p>



# Cables for robotic technology

## References

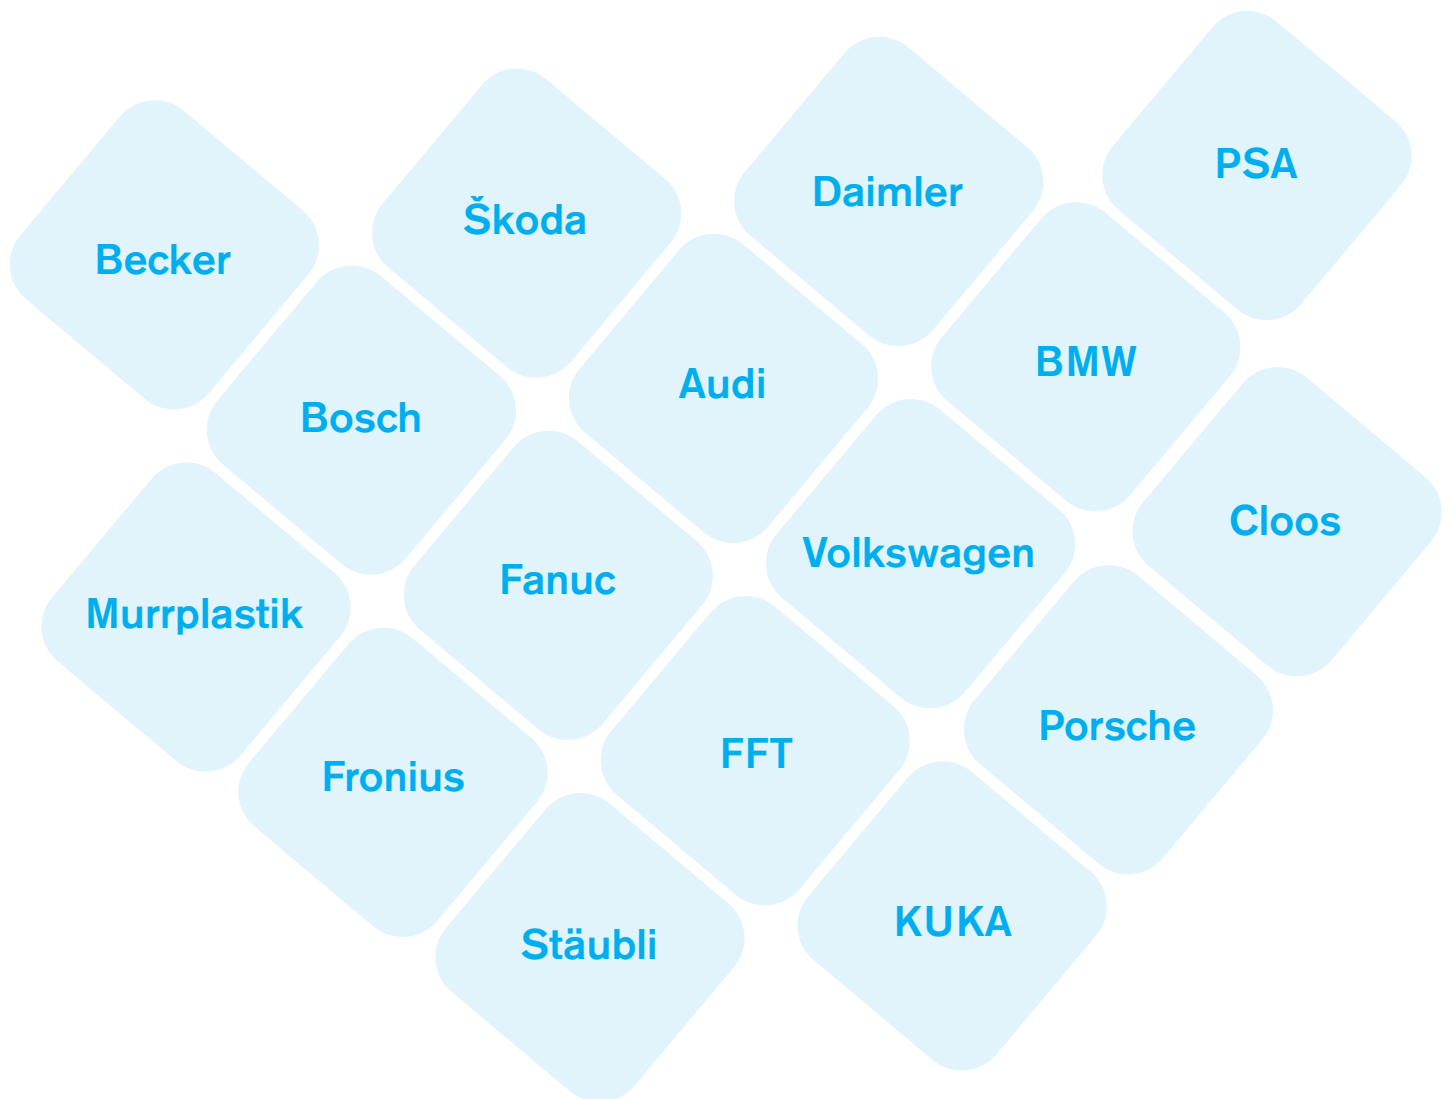

**D-U-N-S® number**  
**315 499 111 worldwide**



	<u>Supplier no.</u>
Audi	1917/0
BMW	609 213-10
Daimler	102 218 10
Ford	DJM5A
PSA	A00DYT 01
Porsche	11 901
Škoda	27597
VW	1917-0
VW Mexico	600 200 57 70










Grafik: Murrplastik Systemtechnik, Oppenweiler

## Content

Family business in the third generation .....	2
References .....	3
Cables for dress package .....	4

▶ Welding cables for robot applications .....	6
▶ Welding cables for robot applications, cULus recognized  .....	7
▶ Control cable for welding guns .....	8-9
▶ Control cables .....	10-11
▶ Robot motor cables .....	12
▶ KSR cables - constant welding current control .....	13
▶ Transmission cables/Encoder cables, UL recognized, CSA approved   .....	14
▶ Robot hybrid cable .....	15
▶ Robot multibus cable, UL recognized  .....	16
▶ Hybrid cables .....	17
▶ Power cable 5 x 1,5 mm <sup>2</sup> .....	18
▶ RT profinet cables CAT 5 .....	19
▶ RT Ethernet cables CAT 6A .....	20
▶ RT hybrid Ethernet cables CAT 6 .....	21
▶ Our testing machines .....	22
▶ Our cable harnessing workshop .....	23

## Welding cables for robot applications

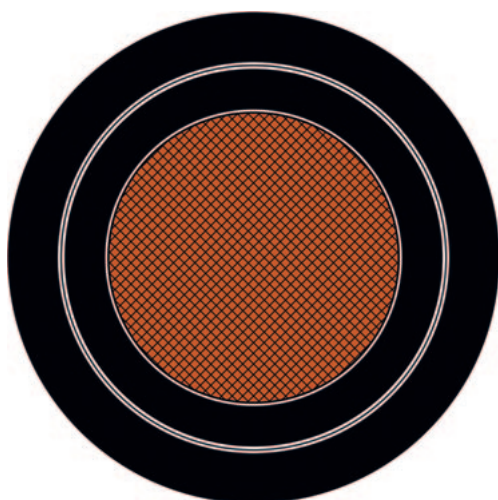

### Construction:

<b>Conductor:</b>	bare copper strands acc. to IEC 60228
<b>Sheath material:</b>	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2

item no.	dimension mm <sup>2</sup>	colour-coding	outer-ø ≈ mm
0726-0001	1 x 16,0	bk/bk	10,1
0726-0002	1 x 25,0	bk/bk	11,1
0726-0003	1 x 25,0	gnye/bk	11,1
0726-0004	1 x 35,0	bk/bk	13,3
0726-0005	1 x 35,0	gnye/bk	13,3
0726-0006	1 x 50,0	bk/bk	15,8
0726-0007	1 x 70,0	bk/bk	18,2
0726-0008	1 x 95,0	bk/bk	20,7


Other dimensions and colours are possible on request.



### Preferred type

### Technical Data:

Operating voltage	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
750 V (DC)	2000 V (AC)	flexible application: -40/+90 °C	recommended: 7,5 x d	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union

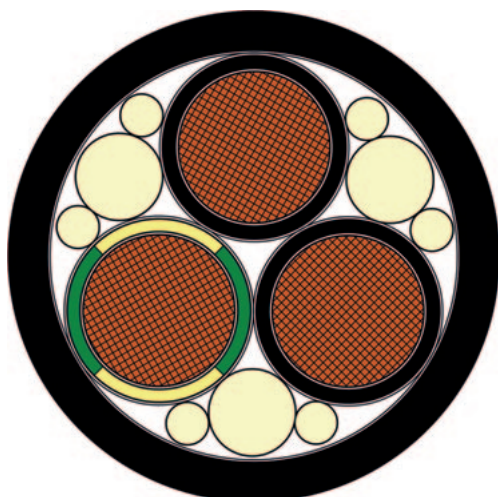

### Construction:

<b>Conductor:</b>	bare copper strands acc. to IEC 60228
<b>Insulation:</b>	PUR
<b>Colour code:</b>	black cores with consecutive numbers acc. to EN 50334 + VDE 0293-334, green-yellow earth wire from 3 cores
<b>Sheath material:</b>	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
<b>Sheath colour:</b>	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0726-0009	3 x 16,0	19,3
0726-0010	3 x 25,0	23,3
0726-0011	3 x 35,0	26,6
0726-0012	3 x 50,0	30,8


Other dimensions and colours are possible on request.

### Technical Data:

Operating voltage	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
≤ 16,0 mm <sup>2</sup> = 500 V (DC) ≥ 25,0 mm <sup>2</sup> = 750 V (DC)	≤ 16,0 mm <sup>2</sup> = 1500 V (AC) ≥ 25,0 mm <sup>2</sup> = 2000 V (AC)	flexible application: -40/+90 °C	recommended: 7,5 x d	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union

## Welding cables for robot applications

cULus recognized

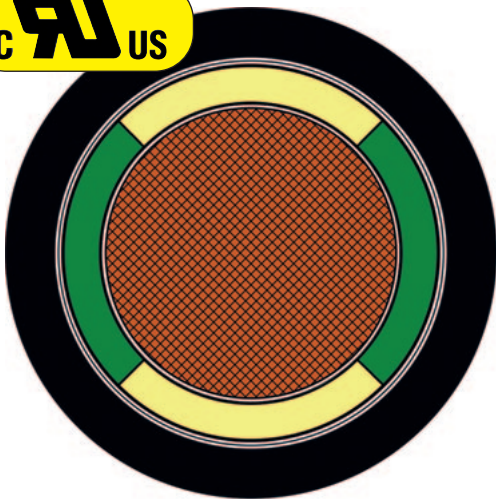

### Construction:

Conductor:	copper strands acc. to IEC 60228
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2

item no.	dimension mm <sup>2</sup>	colour-coding	outer-ø ≈ mm
0726-0013	1 x 10,0	bk/gnye	7,0
3768-9071	1 x 10,0	pk functional earth	7,0
3768-9010	1 x 16,0	bk/gnye	8,9
0726-0015	1 x 25,0	gnye/bk	11,1
0390-9602	1 x 25,0	bk/bk	11,1
0390-9604	1 x 35,0	bk/bk	13,3
0390-9605	1 x 35,0	bk/gnye	13,3
0390-9582	1 x 50,0	bk/bk	15,8
0390-9583	1 x 70,0	bk/bk	18,0

Other dimensions and colours are possible on request.

### Technical Data:

Operating voltage	Voltage UL/CSA	Testing voltage	Temperature range	Min. bending radius	Halogen-free	Absence of harmful substances
750 V (DC)	1000 V	10000 V	flexible application: -40/+90 °C cULus: up to +80 °C	recommended: 7,5 x d	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union



Foto: Murrplastik Systemtechnik GmbH





### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow earth wire
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2 with mat surface
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0796-9081	5 x (2 x 0,75) D + 22 x 0,75	16,0

Other dimensions and colours are possible on request.

### Technical Data:

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
U <sub>0</sub> /U 300/500 V	core/core 2000 V (AC) core/screen 2000 V (AC)	flexible application: -40/+80 °C	recommended: 10 x d	acc. to RoHS directive of the European Union

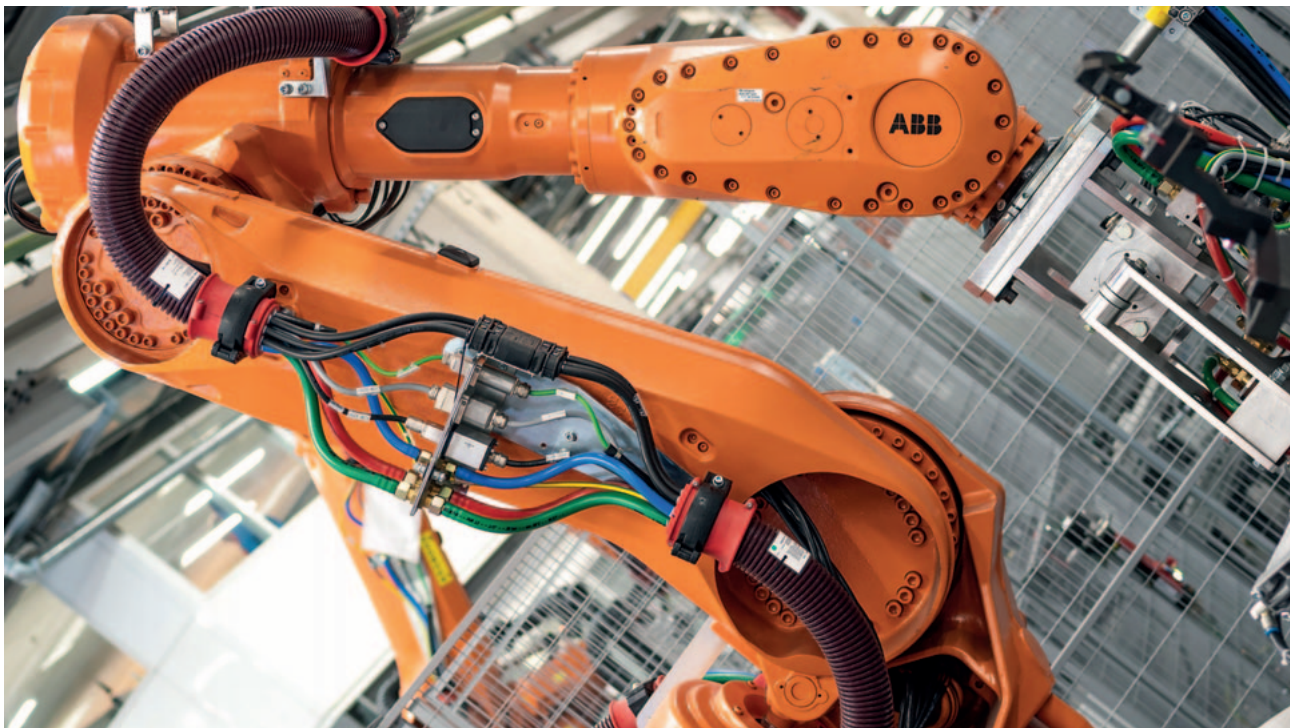


Foto: Becker GmbH, Dülmen





### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow earth wire
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	sky blue (RAL 5015)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0399-0157	3 x 1,0 + 4 x 0,5 + 3 x 3 x 0,5 + (2 x 0,5) D	12,1

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 500 V	core/core 1500 V core/screen 1200 V	flexible application: -40/+90 °C	recommended: 10 x d	acc. to RoHS directive of the European Union


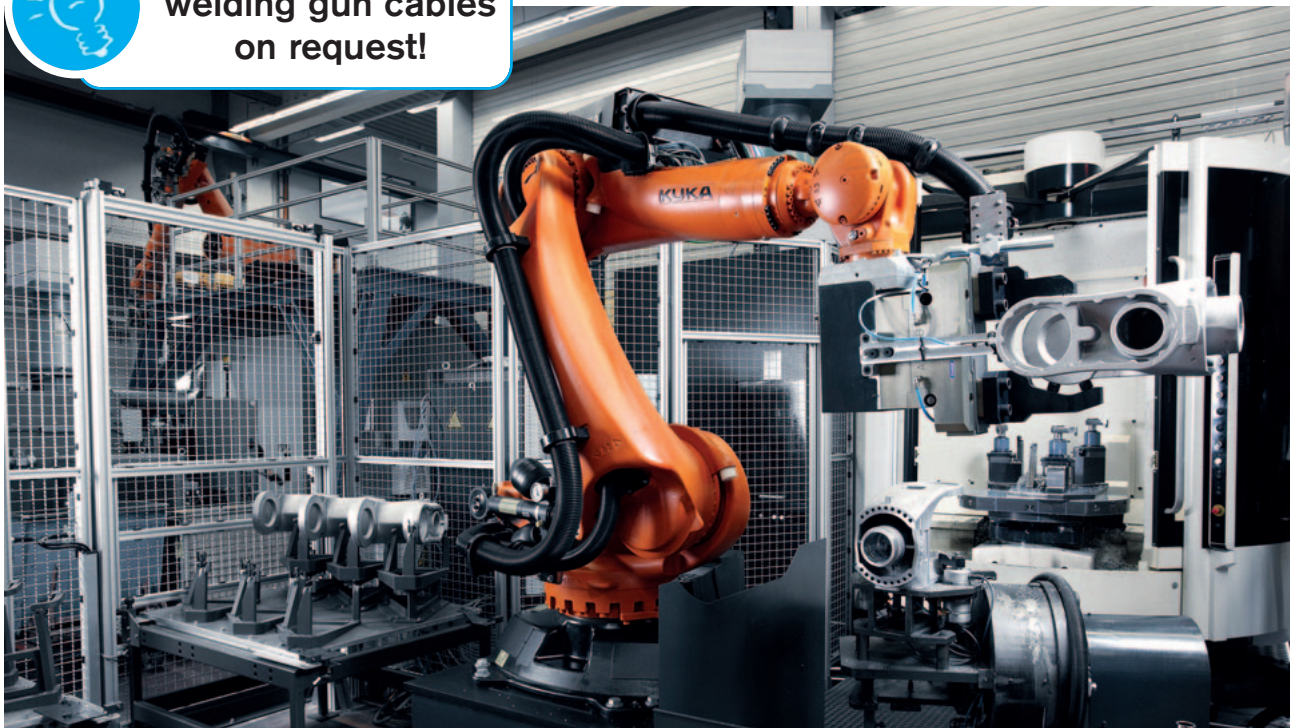


Foto: KUKA AG

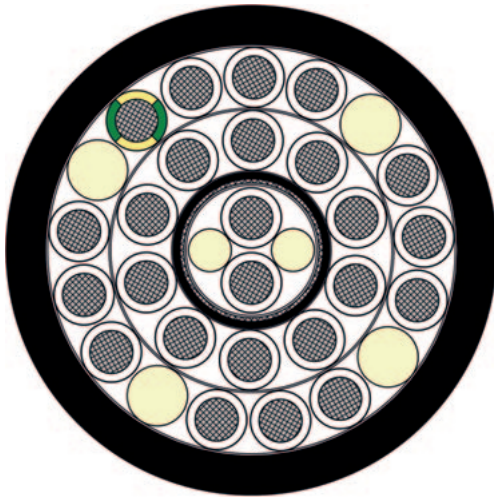

### Construction:


Conductor:	tinned copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow earth wire
Inner sheath:	TPE
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0764-9065	23 x 1,0 + (2 x 1,0) D	13,5

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 600 V	core/core 2000 V core/screen 1200 V	flexible application: -40/+90 °C	recommended: 10 x d	acc. to RoHS directive of the European Union

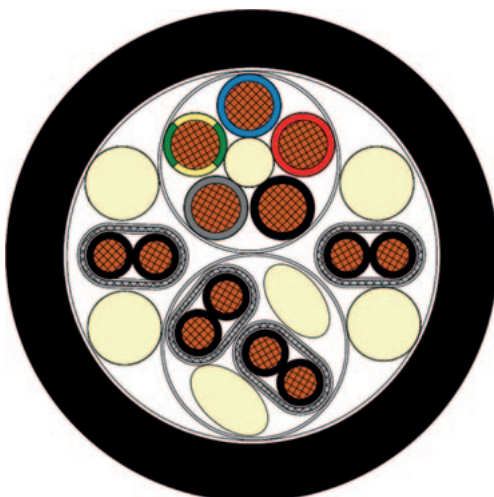

### Construction:


Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	coloured acc. to specification
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0726-0025	5 x 1,0 + 4 x (2 x 0,5) D	13,7

Other dimensions and colours are possible on request.

### Technical Data:

Min. bending radius	Torsion angle	Temperature range	PWIS uncritical	Absence of harmful substances
recommended: 10 x d	up to ±180°/0,5 m	flexible application: -40/+90 °C	all our robot cables are free from paint-wetting impairment substances	acc. to RoHS directive of the European Union

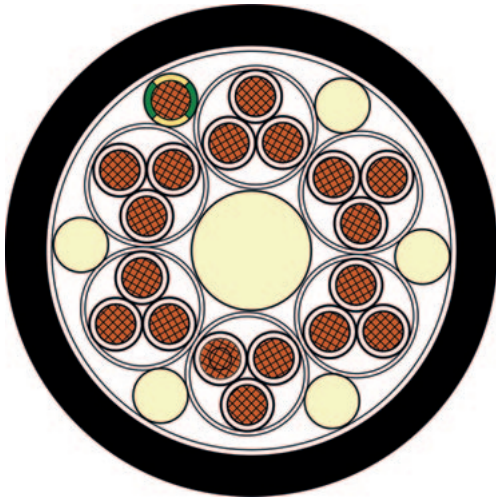

### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow earth wire
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0760-9190	18 x 1,00	12,9
0760-9151	19 x 0,75	12,4
0760-9056	19 x 1,00	13,3

Other dimensions and colours are possible on request.

### Technical Data:

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	core/core 1500 V	flexible application: -40/+90 °C	recommended: 10 x d	acc. to RoHS directive of the European Union




**Your haven't found  
your special cable?**

Please contact our specialists!



Foto: KUKA AG



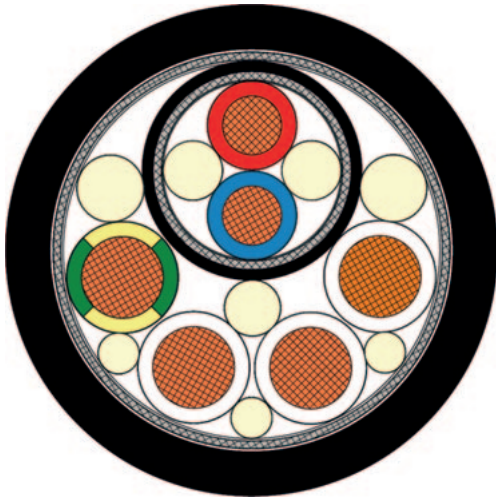


### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	acc. to specification
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0764-9120	4 x 0,75 + 2 x (2 x 0,34)	9,7
0796-9253	4 x 1,5 + 2 x (2 x 0,75) D	13,9
0779-9043	4 x 2,5 + 2 x 1,0	12,1
0726-0070	4 x 2,5 + (2 x 1,0) C	12,1
0841-9202	4 x 2,5 + (2 x 1,5) C	12,9


### Technical Data:

Nominal voltage	Temperature range	Halogen-free	Absence of harmful substances
U <sub>0</sub> /U 450/750 V	flexible application: -40/+90 °C	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union

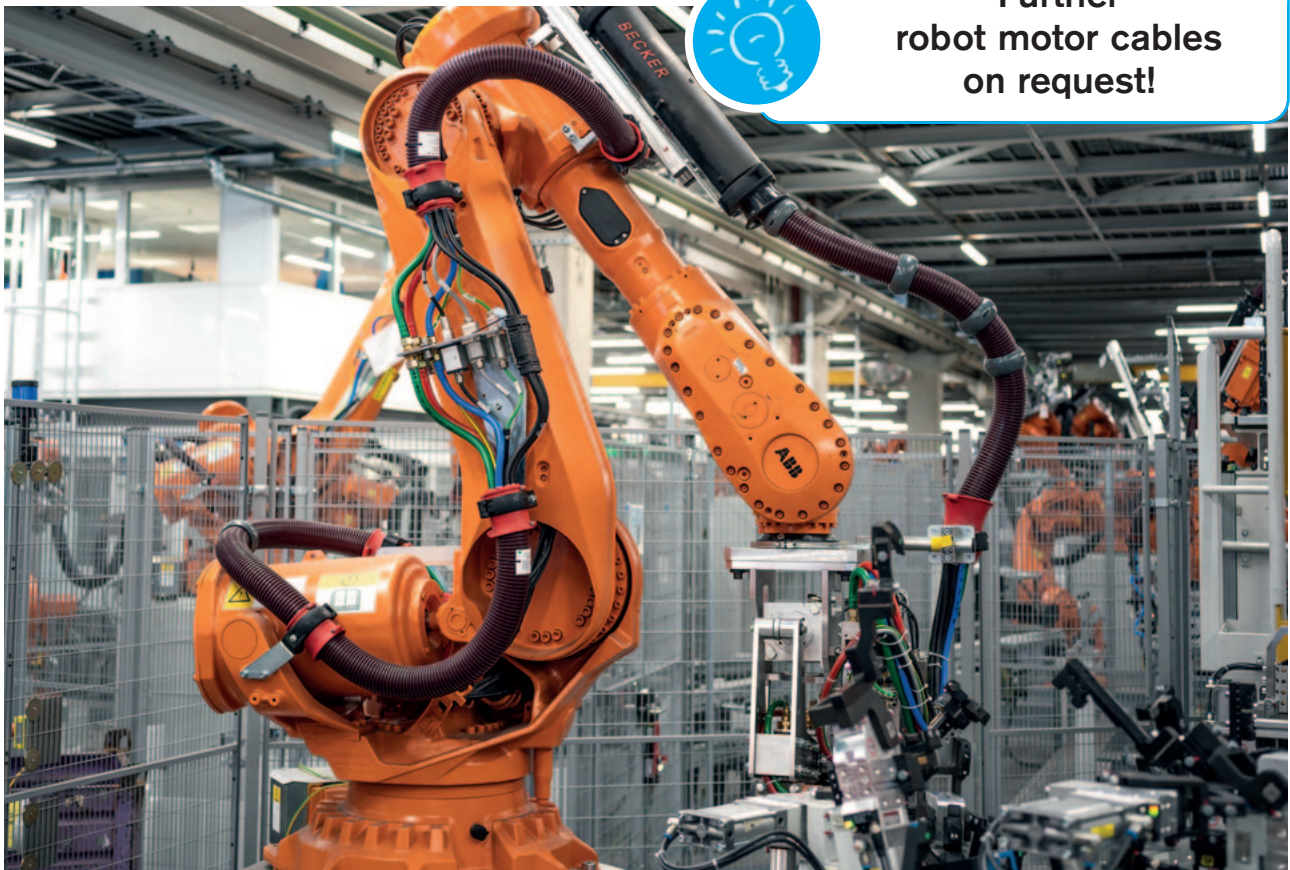

Further  
robot motor cables  
on request!

Foto: Becker GmbH, Dülmen

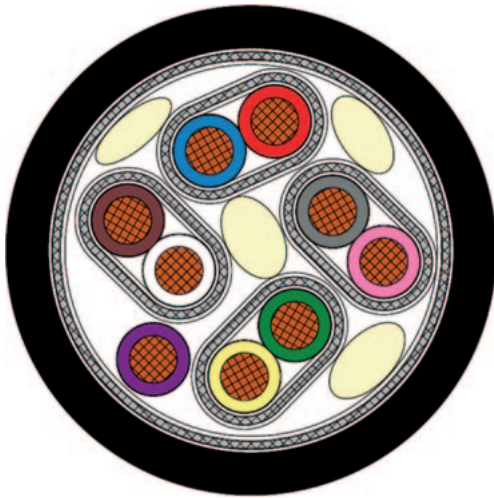

### Construction:

Conductor:	copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	acc. to specification
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0795-9035	(2 x 0,5) D + (2 x 0,5) D	8,8
0726-0033	(2 x 0,5) D + 2 x 0,5	8,2
0796-9101	(3 x 1,0) D + (2 x 1,0) D + 1 x 1,0	10,4
0726-0035	4 x (2 x 0,50) D + 1 x 0,50	9,6
0726-0036	6 x 0,75 + (3 x 0,75) D	9,8
0726-0037	2 x (2 x 0,75) D + (3 x 0,75) D	10,3
0726-0038	1 x (2 x 0,50) D + 7 x 1,0	9,1

Other dimensions and colours are possible on request.


### Technical Data:

PWIS uncritical	Temperature range	Min. bending radius	Absence of harmful substances
all our robot cables are free of paint-wetting interfering substances	flexible application: -40/+90 °C	recommended: 10 x d	acc. to RoHS directive of the European Union



**Further KSR cables  
on request!**



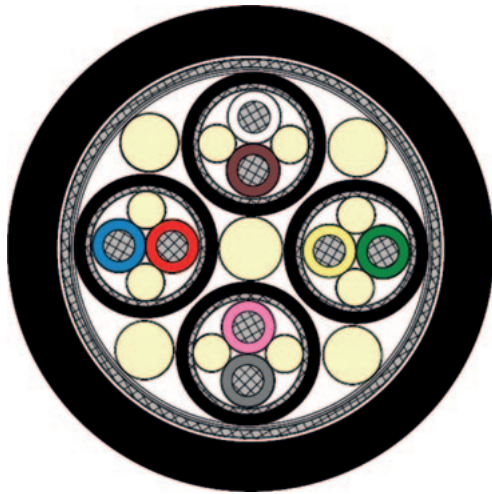

### Construction:


Conductor:	tinned copper strands, fine wires acc. to IEC 60228
Colour code:	with reference to DIN 47100
Stranding:	twisted pairs wrapped with tinned copper wires
Inner sheath:	TPE
Stranding:	pairs together
Total screen:	wrapped with tinned copper wires
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0390-9449	[4 x (2 x 0,25) D] D	9,1

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	PWIS uncritical	Halogen-free	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	free of paint-wetting interfering substances	acc. to IEC 60754-1 + VDE 0482-754-1	flexible application: -40/+70 °C	recommended: 10 x d	acc. to RoHS directive of the European Union

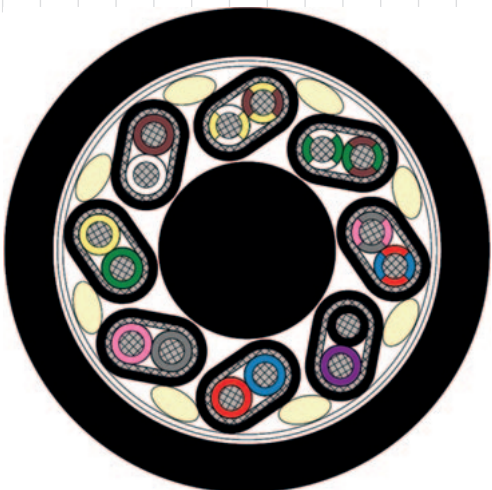

### Construction:

Conductor:	bare copper strands, fine wires acc. to IEC 60228
Insulation:	TPE
Colour code:	with reference to DIN 47100
Stranding:	cores twisted to pairs, pairs in layers
Screen:	wrapped with tinned copper wires
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)


item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0789-9041	8 x (2 x 0,22) D	12,2
0796-9237	8 x 2 x 0,25	8,9

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Torsion angle	Absence of harmful substances
max. 350 V	core/core 1500 V core/screen 1200 V	flexible application: -40/+90 °C	recommended: 10 x d	up to ±180°/0,5 m	acc. to RoHS directive of the European Union



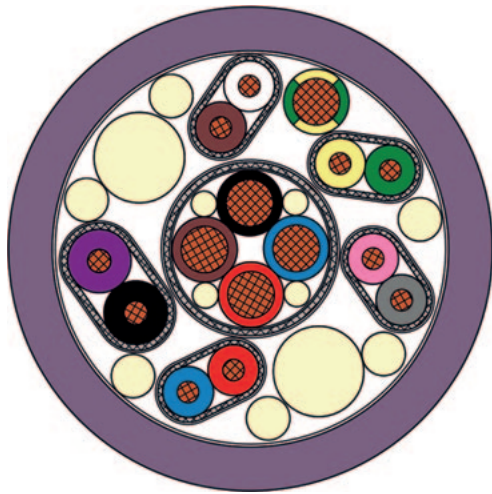

### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	special Polymer / TPE
Colour code:	with reference to DIN 47100 + black, blue, red, brown, green-yellow
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	redlilac (RAL 4001)

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0726-0042	4 x 1,0 + 5 x 2 x 0,25 + 1 x 1,0	13,2

Other dimensions and colours are possible on request.

### Technical Data:

Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	core/core 1700 V core/screen 1000 V	flexible application: -40/+70 °C	recommended: 10 x d	acc. to RoHS directive of the European Union




**Your haven't found  
your special cable?**

Please contact our specialists!



Foto: KUKA AG

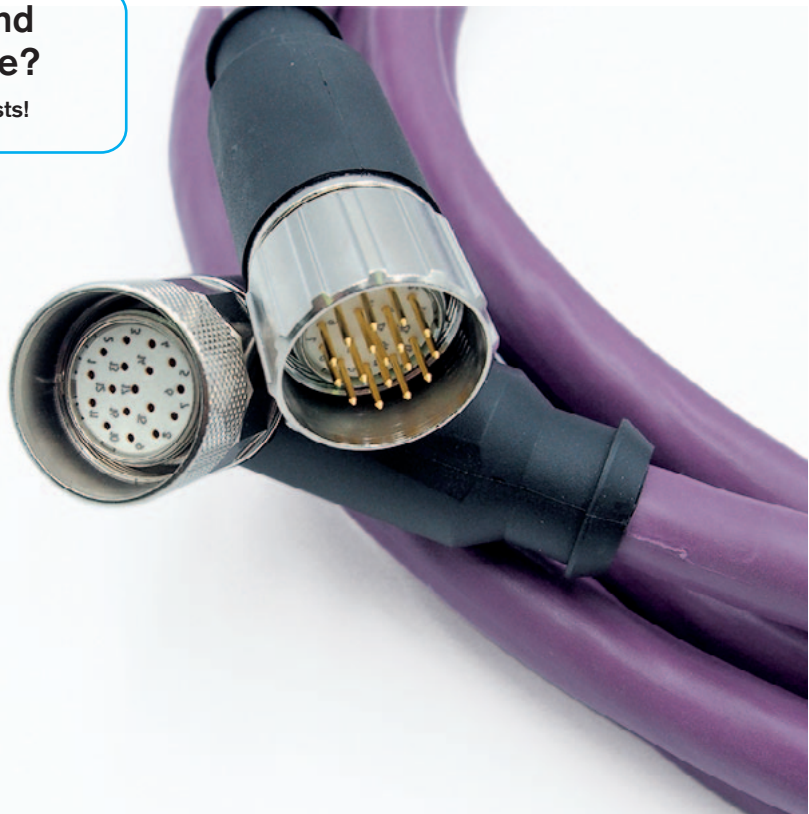



### Construction:



<b>Conductor:</b>	bare resp. tinned copper strands acc. to IEC 60228
<b>Sheath material:</b>	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
<b>Sheath colour:</b>	redlilac (RAL 4001)


item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0726-0043	$2 \times (2 \times 0,25) D + 2 \times (2 \times 0,34) D + 1,0 + (2 \times 0,29) D + 2 \times (2 \times 1,0) D$	13,9

Other dimensions and colours are possible on request.

### Technical Data:

Operating voltage	Voltage UL	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 350 V	30 V	core/core 1000 V core/screen 700 V	flexible application: -40/+70 °C UL: up to +80 °C	recommended: 12 x d	acc. to RoHS directive of the European Union

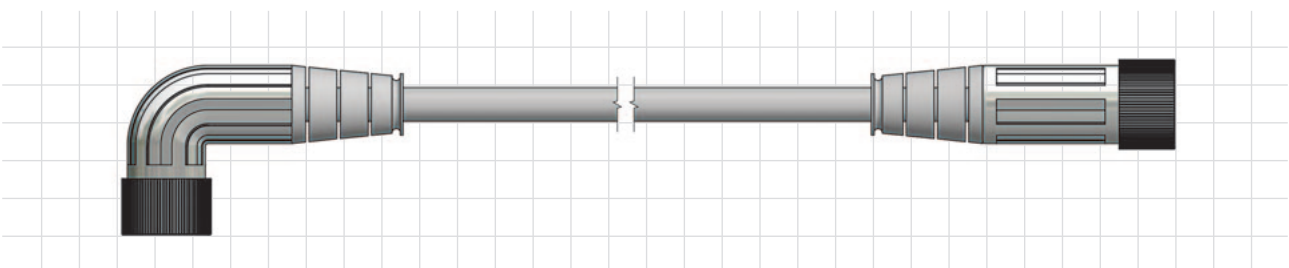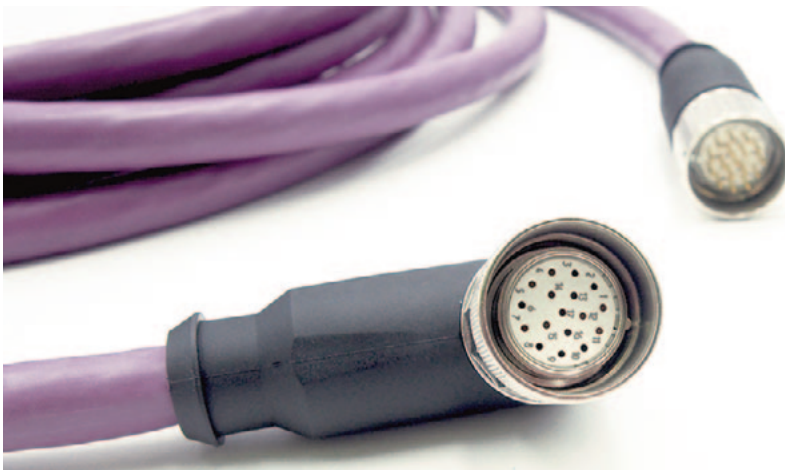

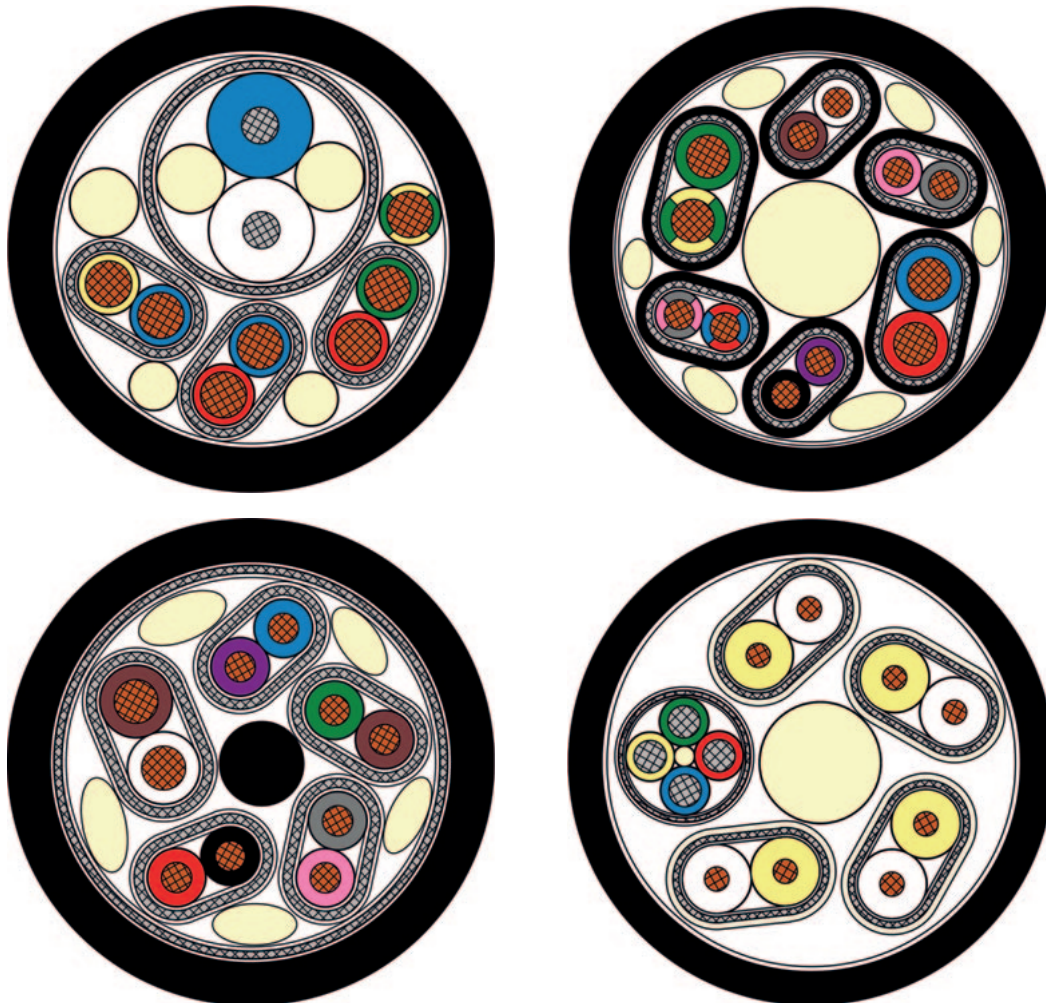

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0625-9019	(2 x 0,34) D CB + 3 x (2 x 0,50) D + 1 x 0,50	9,4
0803-9208	4 x (2 x 0,25) D + 2 x (2 x 0,50) D	10,6
0796-9238	4 x (2 x 0,25) D + (2 x 0,50) D	10,4
1639-9009	4 x (2 x AWG 24) D Cat.6 + (4 x 0,50) D	11,6


Other dimensions and colours are possible on request.





## Power cable

5 x 1,5 mm<sup>2</sup>

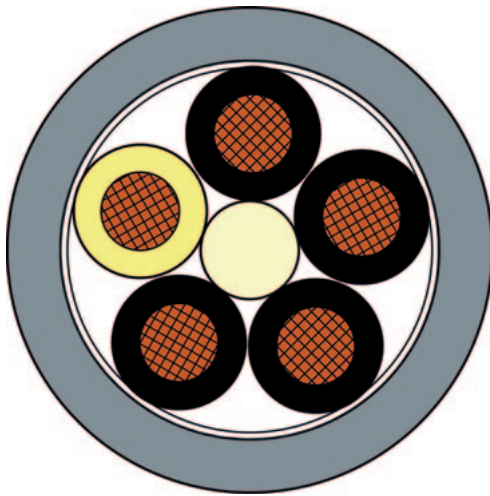

item no.	dimension mm <sup>2</sup>	outer-ø ≈ mm
0726-0047	5 x 1,5	9,9
Other dimensions and colours are possible on request.		



We assemble our cables with  
your requested plugs even for small quantities.  
Please contact us!

## Push-Pull




7/8"



M12



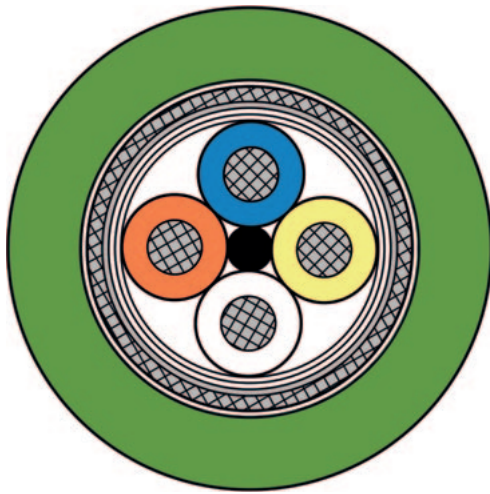

### Construction:

Conductor:	tinned copper strands acc. to IEC 60228
Colour code:	white, blue, orange, yellow
Stranding:	twisted paires, resp. twisted to star quad
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	green (RAL 6018)

item no.	dimension mm <sup>2</sup>	category	outer-ø ≈ mm	stranding
0668-9001	2 x 2 x 22 AWG	CAT 5	7,0	star quad
0668-9039	2 x 2 x 22 AWG	CAT 5	7,8	paired

Other dimensions and colours are possible on request.

### Technical Data:


Peak operating voltage	Testing voltage	Temperature range	Torsion angle	Application	Absence of harmful substances
max. 350 V	core/core 1500 V core/screen 1200 V	flexible application: -30/+70 °C	recommended: ±180°/m	suitable for EtherCAT and EtherNET/IP applications	acc. to RoHS directive of the European Union



Type R

We assemble our cables  
with connectors  
of all well-known  
manufacturers



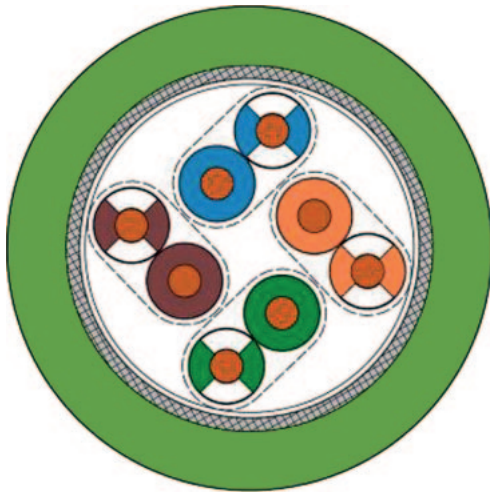

### Construction:

Conductor:	copper strands acc. to IEC 60228
Colour code:	coloured acc. to specification
Stranding:	cores twisted to pairs
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	green (RAL 6018)

item no.	dimension mm <sup>2</sup>	category	outer-ø ≈ mm	stranding
1687-4631	4 x 2 x 26 AWG	CAT 6A	7,1	paired

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Torsion angle	Application	Absence of harmful substances
max. 90 V	core/core 2000 V core/screen 2000 V	flexible application: -30/+70 °C	recommended: ±180°/m	suitable for EtherCAT and EtherNET/IP applications	acc. to RoHS directive of the European Union



Foto: ©ipopba - stock.adobe.com





### Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	4 x 2 x AWG 26: FEP 4 x 1,0 mm²: TPE
Colour code:	4 x 2 x AWG 26: white-blue/blue, white-orange/orange, white-green/green, white-brown/brown 4 x 1,0 mm²: black cores with consecutive numbers acc. to EN 50334 + VDE 0293-334
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm²	outer-ø ≈ mm
0694-9001	4 x 2 x AWG 26 + 4 x 1,0	12,6

Other dimensions and colours are possible on request.

### Technical Data:

Peak operating voltage	Nominal voltage	Testing voltage	Temperature range	Min. bending radius	Application	Absence of harmful substances
4 x 2 x AWG 26: max. 350 V	4 x 1,0 mm²: 300/500 V	4 x 2 x AWG 26: core/core 1500 V core/screen 1200 V 4 x 1,0 mm²: core/core 2000	flexible application: -40/+90 °C	recommended: 10 x d	suitable for EtherCAT and EtherNET/IP applications	acc. to RoHS directive of the European Union



**Teach Pendant cables  
on request!**




# Cables for robotic technology



## Our testing machines

Our modern testing machines comply with the current standards of automotive industry and enable us to reproduce nearly all customer-specific requirements.

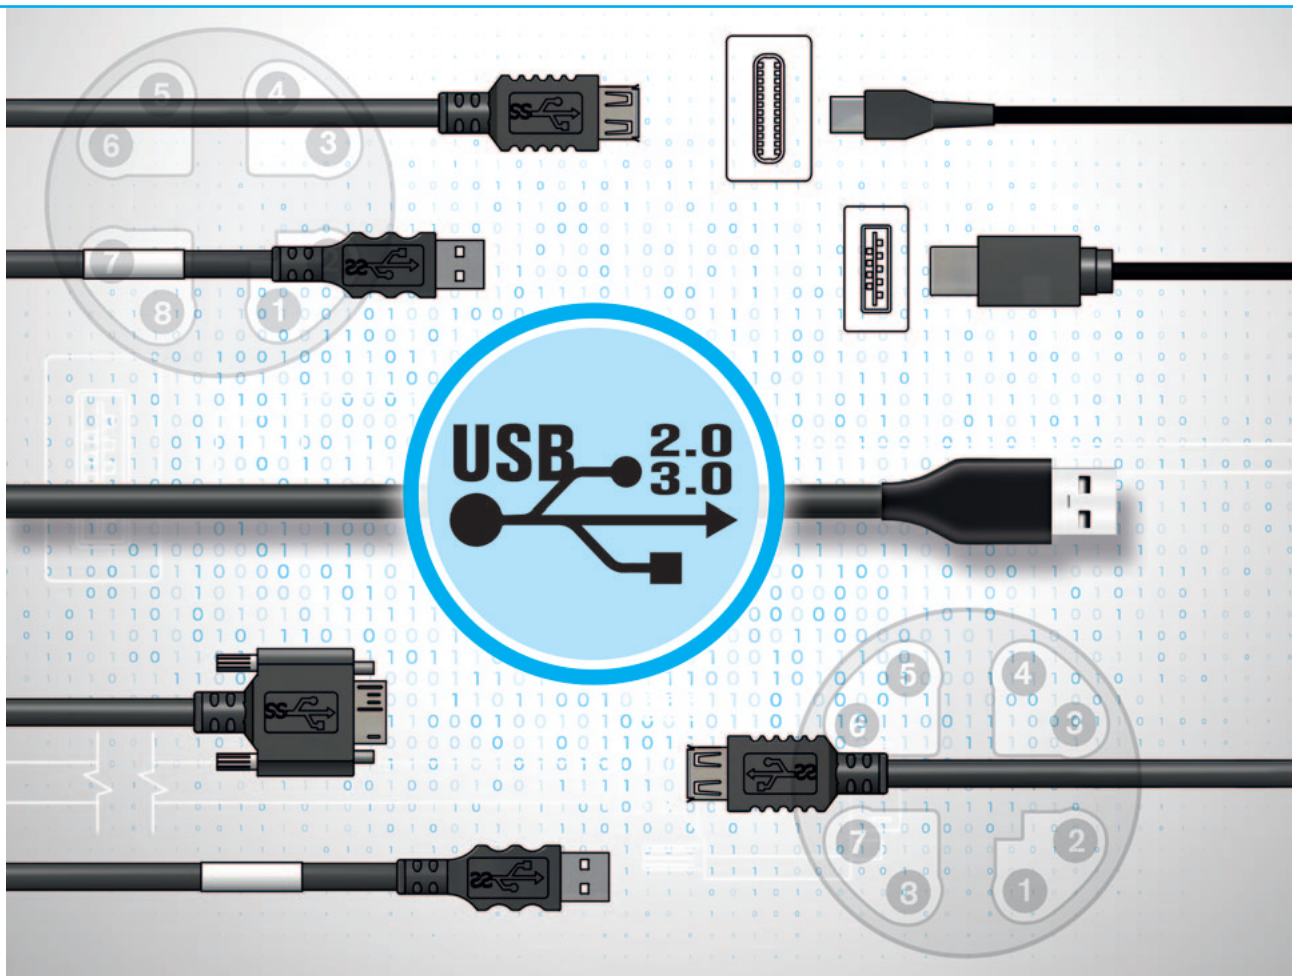




# Cables ready for connection

## Our cable harnessing workshop




It doesn't matter if standard or special cable harness, we produce high-quality cables to the ready-made product with connector. A high quality standard is very important for us by permanent quality control.

As manufacturer of ready-made cables or complete cable assemblies we offer a broad range especially according to application field and your special demands.

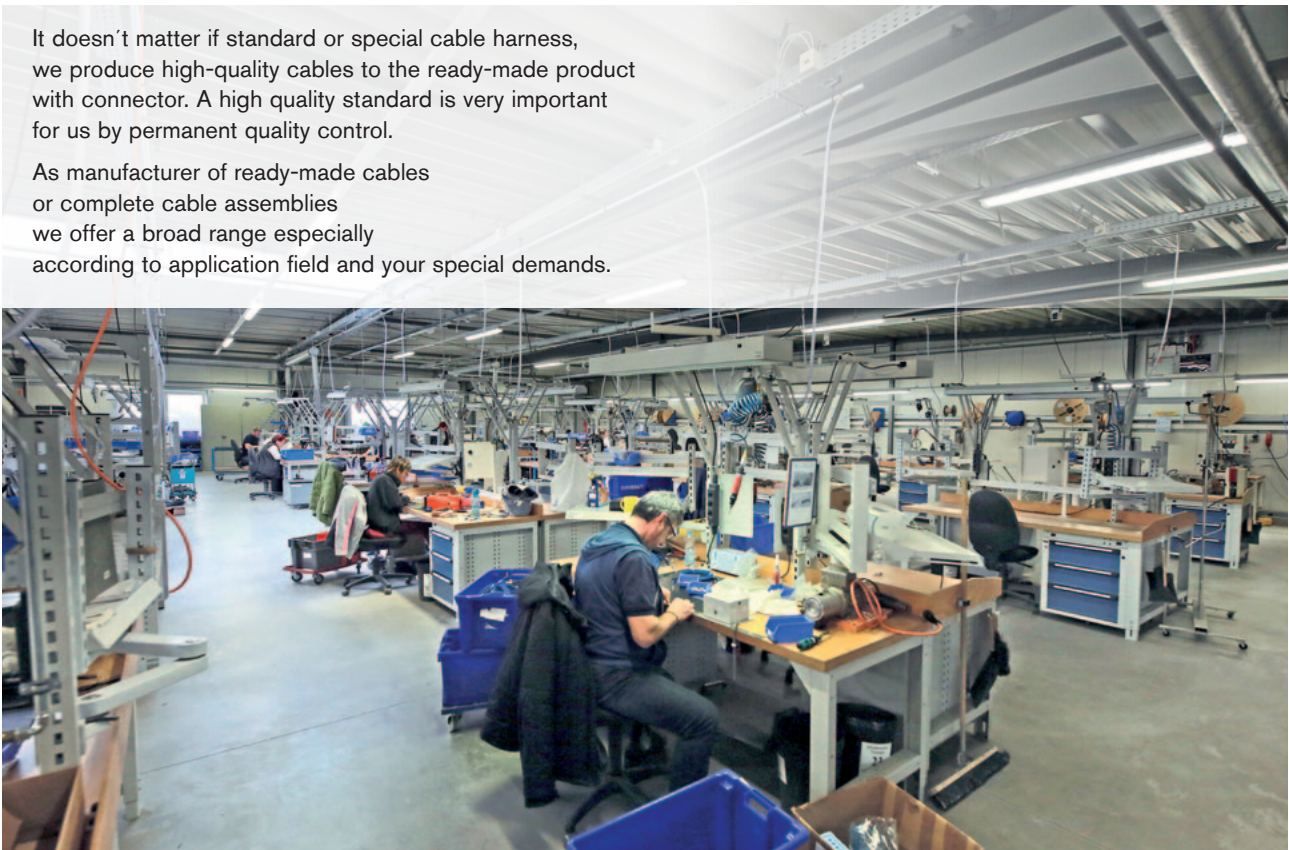



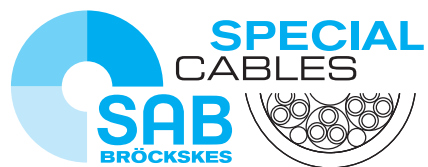

**SAB** Bröckskes GmbH & Co. KG

Greifrather Str. 204 - 212 b

41749 Viersen · GERMANY

Tel.: +49/2162/898-0

Fax: +49/2162/898-101

[www.sab-cable.com](http://www.sab-cable.com)

[info@sab-cable.com](mailto:info@sab-cable.com)